SWISS SCREEN TECHNOLOGY

The G-DRY 551 is a horizontal drying cabinet with individual drawers and a work surface with optional luminous LED surface



G-DRY 551

Marabu Scandinavia - Sweden
040-672 84 00/08-448 07 50
info@marabu.se - www.marabu.se

Marabu Scandinavia - Denmark
70 10 00 67
info@marabu.dk - www.marabu.dk

Marabu Scandinavia - Norway
22 73 50 00
info@marabu.no - www.marabu.no

Marabu Scandinavia - Finland
09-279 85 40
info@marabu.fi - www.marabu.fi

Grünig-SignTronic AG
CH-3150 Schwarzenburg
☎ +41 31 734 26 00
info@grunig-signtronic.com
www.grunig-signtronic.com

Grünig SignTronic

G-DRY 551
Horizontal screen dryer cabinet


Work table


Temperature setting


Drying drawer

Particular features:

- Horizontal drying of wet or coated screens
- Optimal drying of coated screens - regardless of the emulsion thickness
- Rugged tubular construction of stainless steel V2A
  and varnished aluminum sheet
- Compact construction method
- 5 free-moving drawers, running on ball-bearings
- One drawer is capable of holding several screens
- Continuously adjustable heating temperature by means of digital temperature regulator
- Digital temperature display (reference/actual values)
- The covering can be used either as a work surface or optionally as a luminous LED surface

Temperature

- Continuously adjustable up to max. 45°C (at a room temperature of 20°C)

Version A1

- One-sided drawers to be pulled out towards the front

Version A2

- Two-sided drawers, to be pulled out towards the front and the back

Option I

- Energy-saving construction thanks to additional insulation

Option L

- Luminous surface with LED panel

Option S1

- Standard screen support

Option S2

- Screen support for small screens

Option V1


- Exhaust air hookup for connecting the dryer cabinet with a ventilation system installed by customers


Option V2

- Active fresh air supply for an additional acceleration of the drying process



Screen format	SB screen width	mm	1000-2500
	SL screen length	mm	1000-2000
	Profile thicnkess	mm	max.50
Sizes	Width	mm	SB+470
	Depth	mm	SL+270
	Height	mm	1000
Power supply	Voltage	V	3x400+N+PE 3x220+PE
	Frequency	Hz	50/60
Permanent sound pressure level		dB (A)	<70

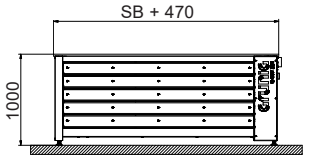

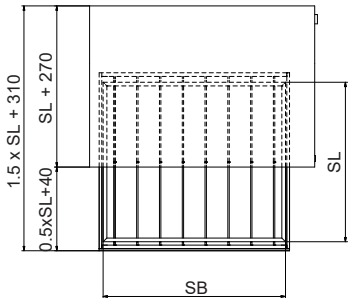

CE

EC Conformity
The product answers the requirements of the EU Machinery Directive.

All the measures are specified in mm
Technical changes are reserved